

TM 11-6625-2745-14

TECHNICAL MANUAL

**OPERATOR, ORGANIZATIONAL,
DIRECT AND GENERAL SUPPORT
MAINTENANCE MANUAL**

(NSN 6625-00-420-9354)

**VOLTMETER, ELECTRONIC
ME-30F/U**

**AND
VOLTMETER, ELECTRONIC AN/USM-265A**

This copy is a reprint which includes current
pages from Changes 1 and 2.

HEADQUARTERS, DEPARTMENT OF THE ARMY
June 1976

**OPERATOR, ORGANIZATIONAL, DIRECT SUPPORT AND GENERAL
 SUPPORT MAINTENANCE MANUAL
 VOLTMETER, ELECTRONIC ME-30F/U
 (NSN 6625-00-420-9345)
 AND
 VOLTMETER, ELECTRONIC AN/USM-265A**

REPORTING OF ERRORS

You can improve this manual by recommending improvements using DA Form 2028-2 (Test) located in the back of the manual. Simply tear out the self addressed form, fill it out as shown on the sample, fold it where shown, and drop it in the mail.

If there are no blank DA Form 2028-2 (Test) in the back of your manual, use the standard DA Form 2028 (Recommended Changes to Publications and Blank Forms) and forward to the Commander, US Army Communications and Electronics Readiness Command, ATTN: DRSEL-MA-Q, Fort Monmouth, NJ 07703.

In either case a reply will be furnished direct to you.

		Paragraph	Page
CHAPTER	1. INTRODUCTION		
Section	I. General	1-1	1-1
	II. Description and data	1-6	1-1
CHAPTER	2. SERVICE UPON RECEIPT AND INSTALLATION		2-1
CHAPTER	3. OPERATING INSTRUCTIONS		3-1
Section	I. Controls and Instruments	3-1	3-1
	II. Operation Under Usual Conditions	3-3	3-2
	III. Operation Under Unusual Conditions	3-10	
CHAPTER	4. OPERATOR AND ORGANIZATIONAL MAINTENANCE INSTRUCTIONS		4-1
Section	I. Operator and Organizational Tools and Equipment	4-1	4-1
	II. Operator and Organizational Preventative Maintenance Checks and Service	4-4	4-1
	III. Troubleshooting	4-10	4-3
CHAPTER	5. FUNCTIONING OF EQUIPMENT	5-1	5-1
	6. DIRECT SUPPORT MAINTENANCE INSTRUCTIONS		6-1
	7. GENERAL SUPPORT MAINTENANCE INSTRUCTIONS		7-1
Section	I. General	7-1	7-1
	II. General Support Tools and Equipment	7-2	7-1
	III. Troubleshooting	7-3	7-1
	IV. Maintenance of Voltmeter	7-5	7-6
	V. General Support Testing Procedures	7-8	7-7
APPENDIX	A. REFERENCES		A-1
	B. BASIC ISSUE ITEMS TROOP INSTALLED OR AUTHORIZED LIST (not applicable)		
	C. MAINTENANCE ALLOCATION CHART		C-1
INDEX			Index 1


LIST OF ILLUSTRATIONS

<i>Fig. No.</i>	<i>Title</i>	<i>Page</i>
1-1	Voltmeter, Electronic ME-30F/U	1-0
1-2	Voltmeter, Electronic AN/USM-265A	1-0.1
2-1	Equipment packing and packaging	2-2
2-2	Rackmounting assembly	2-3
3-1	Voltmeter, Electronic ME-30F/U and AN/USM-265A, controls and indicators	3-1
3-2	External battery connections	3-3
3-3	Overload characteristics	3-4
3-4	Impedance correction graph	3-5

<i>Fig. No.</i>	<i>Title</i>	<i>Page</i>
5-1	Functional block diagram	5-3
7-1	Voltage and resistance measurements	7-4
7-2	Power supply, accuracy, frequency response, and meter tracking test setup	7-8
7-3	Ac amplifier and dc output test setup	7-11
7-4	Chassis Assembly, parts location diagram	7-12
7-5	Circuit Board Assembly A2, capacitor location diagram	7-14
7-6	Circuit Board Assembly AZ, transistor and diode location diagram	7-15
7-7	Circuit Board Assembly AZ, resistor location diagram	7-16
7-8	Range Switch Assembly A3, parts location diagram	7-17
7-9	Input Attenuator Circuit Board A4A1, parts location diagram	7-17
7-10.	Meter board A5, parts location diagram	7-17
FO-1	tiler code markings for MIL-STD resistors, inductors, and capacitor	Fold-In
FO-2	Voltmeter, Electronic ME-30F/U schematic diagram	Fold-In
FO-3	Voltmeter, Electronic ME-30F/U, wiring diagram	Fold-In
FO-4	Voltmeter, Electronic AN/USM-265A, schematic diagram	Fold-In
FO-5	Voltmeter, Electronic AN/USM-265A, wiring diagram	Fold-In

LIST OF TABLES

<i>Table No.</i>	<i>Title</i>	<i>Page</i>
1-1	Technical characteristic	1-1, 1-2
3-1	Voltmeter, Electronic ME30F/U, and AN/USM-265A, controls and indicators	3-1, 3-2
3-2	Harmonic effects	3-2
3-3	Scale multiplying facts	3-3
3-4	Ac amplifier gain	3-5
4-1	Organizational maintenance test equipment	4-1
4-2	Operator/crew preventive maintenance checks and services	4-2
4-3	Organizational preventive maintenance checks and services	4-2
5-1	Attenuation of meter attenuator	5-1
7-1	List of general support test equipment	7-1
7-2	Troubleshooting	7-5
7-3	Rouge switch resistance readings	7-5
7-4	Power supply voltage tests	7-6
7-5	Assembly prefixes	7-6
7-6	Physical tests and inspections	7-9
7-7	Power supply test	7-9
7-8	Accuracy and frequency response teat	7-9.1
7-9	Ac Amplifier output test	7-11
7-10	Dc output test	7-11
7-11	Meter tracking test (ME-30F/U)	7-11
7-12	Meter tracking test (AN/USM-265A)	7-11

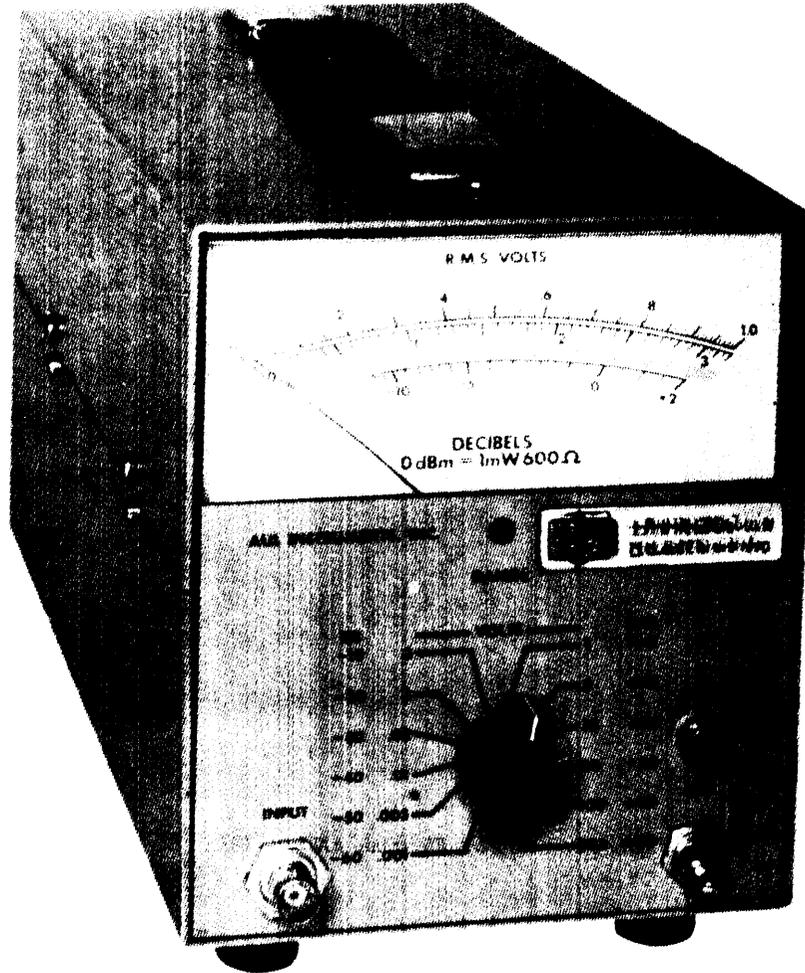

EL11A001

Figure 1-1. Voltmeter, Electronic ME-30F/U.

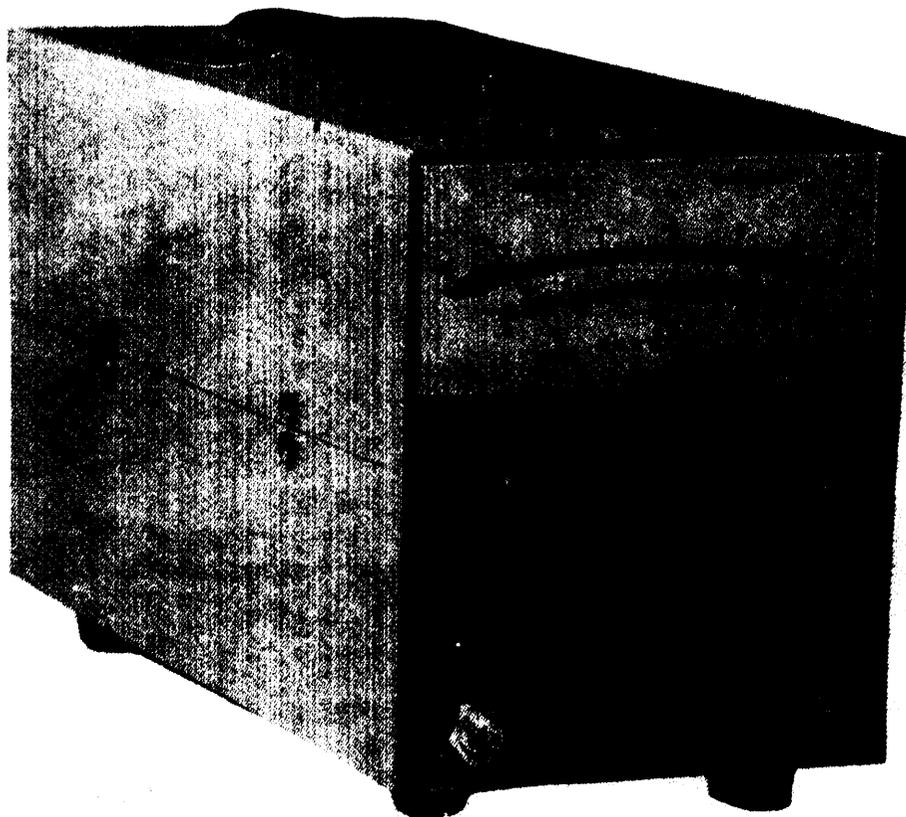


Figure 1-2. Voltmeter, Electronic AN/USM-265A .

CHAPTER 1 INTRODUCTION

Section I. GENERAL

1-1. Scope

This manual describes Voltmeters, Electronic, ME-30F/U and AN/USM-265A (herein after referred to as voltmeter) and covers their installation, operation, and operator, organizational, and general support maintenance. No direct support maintenance is authorized.

NOTE

All references in this manual to ME-30F/U also apply to the AN/USM-265A unless otherwise indicated.

1-2. Index of Publications

a. *DA Pam 310-4.* Refer to the latest issue of DA Pam 310-4 to determine whether there are new editions, changes, or additional publications pertaining to this equipment.

b. *DA Pam 310-7.* Refer to DA Pam 310-7 to determine whether there are modification work orders (MWOs) pertaining to this equipment.

1-3. Forms and Records

a. *Reports of Maintenance and Unsatisfactory*

Equipment Maintenance forms, records, and reports which are to be used by maintenance personnel at all maintenance levels are listed in and prescribed by TM 38-750.

b. *Report of Packaging and Handling Deficiencies.* Fill out and forward DD Form 6 (Packaging Improvement Report) as prescribed in AR 700-58/NAVSUPINST 4030.29/ARF 71-13/MCO P4030.29A, and DLAR 4145.8.

c. *Discrepancy in Shipment Report (DISREP) (SF 361).* Fill out and forward Discrepancy in Shipment Report (DISREP) (SF 361) as prescribed in AR 55-38 /NAVSUPINST 46 10.33 B/AFR 75-18/MCO P4610.19C and DLAR 4500.15.

1-4. Administrative Storage

For procedures, forms, and records, and inspections required during administrative storage of this equipment, refer to TM 740-90-1.

1-5. Destruction of Army Material

Demolition and destruction of electronic equipment will be under the direction of the commander and in accordance with TM 750-244-2.

Section II. DESCRIPTION AND DATA

1-6. Purpose and Use

The voltmeter is used for measuring a.c. voltage, gain, audio frequency (a. f.) and radio frequency (r. f.) levels and hum and noise levels. The scales of the meter permit measurements to be expressed either in decibels per milliwatt (dBm) or in decibels (dB). The voltmeter may also be used as a high gain, broadband amplifier to provide greater sensitivity to other equipment such as oscilloscopes and bridges.

1-7. Description

The voltmeter is a solid state type. The voltage scale is calibrated in terms of root-mean-square (rpms) voltage of a sine wave. Each is capable of measuring alternat-

ing current (at) voltages from .001 volts full scale to 300 volts full scale through a frequency range of 10 hertz to 10 megahertz.

1-8. Differences between Models

The ME-30F/U and the AN/USM-265A are identical with the following exceptions. The AN/USM-265A panel meter scale is linear in decibels, contains a special meter board, and incorporates an adjustable REL REF control on the front panel. The ME-30F/U is complete with line cord whereas the AN/USM-265A consists of a Voltmeter, Electronic ME-340A/U and a detached line cord, AUL Instruments part no. 344250.

Table 1-1. Technical Characteristics

Voltage Range	1 mv to 300 v full scale in 12 ranges; dB scale -10 to +2 dB; 10 dB between ranges.
Accuracy and Frequency Response	a. 1 mini-volt Range 10 Hz to 40 Hz: ± 5% 40 Hz to 500 kHz: ± 1% 500 kHz to 4 MHz: ± 5%
	b. .003 through 300 Volt Range 10 Hz to 40 Hz: ± 5% 40 Hz to 2 MHz: ± 1% 2 MHz to 4 MHz ± 3% 4 MHz to 10 MHz ± 5%
Input Impedance	10 megohms shunted by 25 pf maximum
Amplifier Output	150 millivolt minimum for full scale indicator on .003 -300 volt ranges. 100 millivolts minimum on .001 volt range,