

DEPARTMENT OF THE ARMY TECHNICAL MANUAL

ORGANIZATIONAL, DS, GS,
AND DEPOT MAINTENANCE MANUAL

FREQUENCY SELECTIVE VOLTMETER

MODEL 128A

HEADQUARTERS, DEPARTMENT OF THE ARMY
APRIL 1967

TECHNICAL MANUAL)
)
 NO. 11-6625-1519-15)

HEADQUARTERS
 DEPARTMENT OF THE ARMY
 WASHINGTON, D.C., 10 April 1962

Organizational, DB, GS, and

Depot Maintenance Manual

FREQUENCY SELECTIVE VOLTMETER MODEL 128A

| SECTION | I | GENERAL | Page |
|----------------|------------|--|------|
| | A-1 | SCOPE | 1-1 |
| | A-2 | INDEX CP PUBLICATIONS | 1-1 |
| | A-3 | FORMS AND RECORDS | 1-1 |
| | A-4 | PURPOSE | 1-2 |
| | A-5 | DESCRIPTION | 1-2 |
| | A-6 | SPECIFICATIONS | 1-4 |
| SECTION | II | OPERATION | |
| | A | CONTROLS AND INDICATORS | 2-1 |
| | B | OPERATIONAL CALIBRATION | 2-3 |
| | C | OPERATIONAL MEASUREMENTS | 2-4 |
| SECTION | III | CIRCUIT DESCRIPTION | |
| | A | SIGNAL CHANNEL | 3-1 |
| | | 1. Input Matching and Attenuator Circuits | 3-1 |
| | | 2. Preamplifier | 3-1 |
| | | 3. Input Low-Pass Filter | 3-1 |
| | | 4. First Mixer, First Modulator and First IF | 3-2 |
| | | 5. Second Mixer and Second Modulator | 3-2 |
| | | 6. Second IF Amplifier | 3-2 |
| | | 7. Meter Output Amplifier and Rectifier | 3-3 |
| | | 8. Audio Amplifier and Detector | 3-3 |
| | | 9. Carrier Reinsertion Oscillators | 3-4 |
| | | 10. Gain Reference Oscillator | 3-4 |

| | | Page |
|-------------------|--|------------|
| B | MAIN TUNING AND FREQUENCY LOCK CIRCUITS | 3-4 |
| | 1. Main Tuning Oscillator and Emitter Followers..... | 3-4 |
| | 2. 100 KC Oscillator and Harmonic Generator..... | 3-5 |
| | 3. Main Tuning Mixer..... | 3-5 |
| | 4. Amplifier Detector, Low-Pass Filter and Main Lock Indicator..... | 3-6 |
| C | INCREMENTAL TUNING AND FREQUENCY LOCK CIRCUITS..... | 3-8 |
| | 1. Incremental Tuning Oscillator and First LF Amplifier | 3-8 |
| | 2. Second Oscillator | 3-9 |
| | 3. Incremental Reference Oscillator and Mixer, and Second LF Amplifier | 3-9 |
| | 4. Phase Discriminator and Low-Pass Filter | 3-9 |
| | 5. Incremental Lock Indicator | 3-10 |
| D | POWER SUPPLY CIRCUITS | 3-10 |
| SECTION IV | MAINTENANCE | |
| A | GENERAL | 4-1 |
| B | ALIGNMENT AND CALIBRATION..... | 4-3 |
| | 1. Test Equipment Required | 4-3 |
| | 2. Power Supply | 4-4 |
| | 3. Audio Circuits | 4-4 |
| | 4. Output Amplifier | 4-6 |
| | 5. Crystal Filter | 4-7 |
| | 6. Second IF | 4-7 |
| | 7. First IF | 4-7 |
| | 8. First Modulator | 4-8 |
| | 9. Second Modulator | 4-8 |
| | 10. Input Filter | 4-9 |
| | 11. Tracking and Locking, Main Tuning Oscillator | 4-10 |
| | 12. Incremental Tuning Oscillator, Tracking and Locking | 4-14 |
| | 13. Attenuator Calibration..... | 4-20 |
| | 14. 110 KC Bandpass First IF | 4-21 |
| | 15. General Checks | 4-21 |
| SECTION V | REPLACEABLE PARTS LIST | 5-1 |
| APPENDIX A. | BALANCED PROBE MODEL 128-PA | A-1 |
| | (AUXILIARY EQUIPMENT) | |
| B. | EXPANDED SCALE METER MODEL 128-MA..... | B-1 |
| | (AUXILIARY EQUIPMENT) | |
| C. | UNIVERSAL SPEAKER KIT | C-1 |
| | (AUXILIARY EQUIPMENT) | |

MODEL 128A

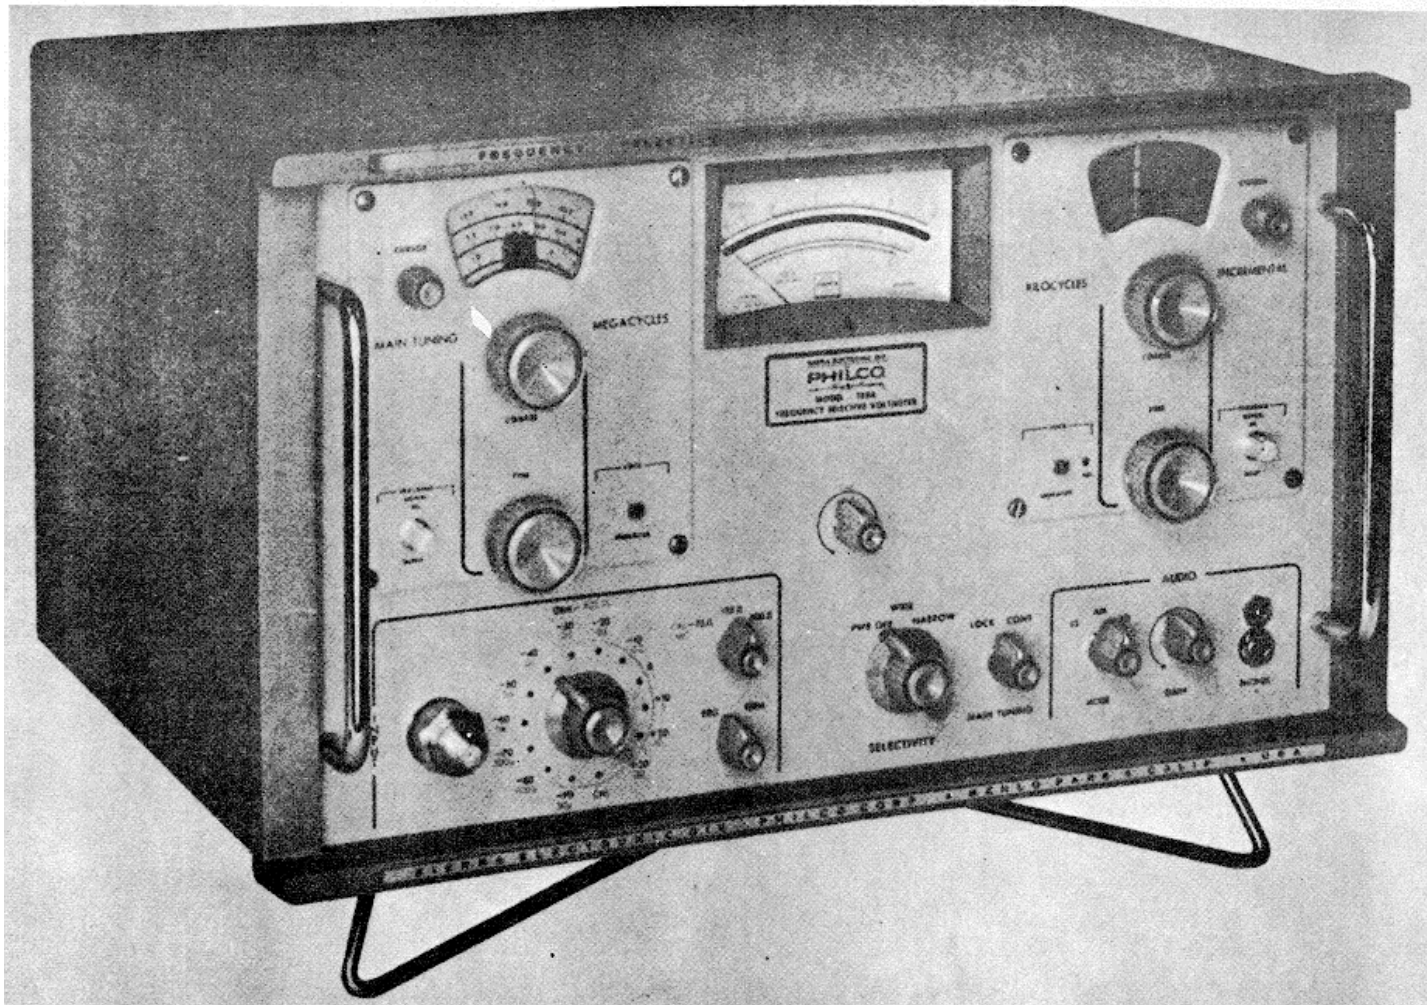


Figure 1-1. Model 128A Frequency Selective Voltmeter

This manual contains material reproduced by permission of Sierra Electronics Division of Philco Corp.

SECTION I.

GENERAL

A-1. SCOPE

a. This manual described Sierra Electronics (Federal Supply Code 94668) Frequency Selective Voltmeter Model 128A. It includes installation and operation instructions and covers operator's, organizational, direct support (DS), general support (GS), and depot maintenance. It also contains instructions for the use of Balanced Probe Model 128-PA, Expanded Scale Meter Model 128-MA, and Universal Speaker Kit.

b. To order this technical manual, requisition through pinpoint account number if assigned, otherwise through nearest Adjutant General Facilities.

A-2. INDEX OF PUBLICATIONS

Refer to the latest issue of DA Pam 310-4 to determine whether there are new editions, changes, or additional publications pertaining to the equipment. DA Pam 310-4 is an index of current technical manuals, technical bulletins, supply manuals (types 7, 8, and 9), supply bulletins, lubrication orders, and modification work orders that are available through publications supply channels. The index lists the individual parts (-10, -20, -35P, etc) and the latest changes to and revisions of each equipment publication.

A-3. FORMS AND RECORDS

a. Reports of Maintenance and Unsatisfactory Equipment. Use equipment forms and records in accordance with instructions in TM 38-750.

b. Report of Damaged or Improper Shipment. Fill out and forward DD Form 6 (Report of Damaged or Improper Shipment) as prescribed in AR 700-58 (Army), NAVSANDA Publication 378 (Navy), and AFR 71-4 (Air Force).

c. Reporting of Equipment Manual Improvements. Report of errors, omissions, and recommendations for improving this manual by the individual user is encouraged. Reports should be submitted on DA Form 2028 (Recommended Changes to DA Publications) and forwarded direct to Commanding General, U.S. Army Electronics Command, ATTN: AMSEL-MR-NMP-AD, Fort Monmouth, New Jersey 07703